

MATERIAL HANDLING EQUIPMENT



Originality Produces Know-how
OPK INTER-CORPORATION SDN BHD (333376-HC)
Make Tomorrow Different
www.opk.com.my



CÔNG TY CỔ PHẦN EPIC VIỆT NAM
Hà Nội: Số 41, Ngõ 35 Lê Đức Thọ, Từ Liêm, Hà Nội
Sài Gòn: 66 Lưu Chí Hiếu, Tây Thạnh, Tân Phú, TPHCM

DRUM HANDLING EQUIPMENT

**Save Space
Environmental Friendly**

Patent No. MY-124822-A



Auto M-2
Capacity: 700 kg
For 200L Steel Drum



Drums can be stacked in the horizontal or vertical position

DRUM GRIPPER

NUM-1



Patent Application No.:
P120084310

Able to grip steel and plastic drums

SPECIFICATIONS


MODEL	Capacity	Width	Length	Height	Drum Size	Net Weight
NUM-1	300 kg	700 mm	975 mm	685 mm	200 L	125 kg

* All specifications are subject to change without prior notice.

* Optional height for different drum sizes (upon request)

HAND PALLET TRUCK

- Easy to lift up
- Light movement

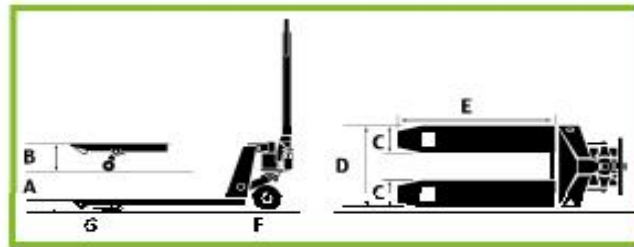

SPECIFICATIONS

MODEL	Capacity (kg)	Min. H	Max. H	Fork Width	Overall Width	Fork Length	Steering Wheels	Load Wheels
		A	B	C	D	E	F	G
OIC-20S-115-A	2,000 kg	75 mm	195 mm	150 mm	530 mm	1,150 mm	PU Ø 180 mm x 50 mm	PU Ø 70 mm x 85 mm
OIC-20L-122-A	2,000 kg	75 mm	195 mm	150 mm	685 mm	1,220 mm	PU Ø 180 mm x 50 mm	PU Ø 70 mm x 85 mm
OIC-25S-115-A	2,500 kg	75 mm	195 mm	150 mm	530 mm	1,150 mm	PU Ø 180 mm x 50 mm	PU Ø 70 mm x 85 mm
OIC-25L-122-A	2,500 kg	75 mm	195 mm	150 mm	685 mm	1,220 mm	PU Ø 180 mm x 50 mm	PU Ø 70 mm x 85 mm
OIC-20S-115H-A	2,000 kg	55 mm	175 mm	150 mm	530 mm	1,150 mm	PU Ø 180 mm x 50 mm	PU Ø 50 mm x 85 mm
OIC-20L-122H-A	2,000 kg	55 mm	175 mm	150 mm	685 mm	1,220 mm	PU Ø 180 mm x 50 mm	PU Ø 50 mm x 85 mm

* All specifications are subject to change without prior notice.

* Different wheels material upon request

HAND TROLLEY

FEATURES

- Solid & Durable
- Light Weight
- Easy to Pull & Manuever
- Foldable Handle

HT-150



HT-300



Stainless Steel Hand Trolley

HT-300SUS



HT-150SUS

SOLID STRUCTURED PLATFORM



OIC Model



Common Model



1. Lift the handle stopper shaft up



2. Push the handle downwards



3. The handle is folded


SPECIFICATIONS

MODEL	HT-150 / HT-150 SUS	HT-150L	HT-300 / HT-300 SUS	HT-300L	HT-500 / HT-500 SUS
Capacity	150 kg	150 kg	300 kg	300 kg	500 kg
Platform Size	400 mm x 700 mm	500 mm x 800 mm	500 mm x 800 mm	600 mm x 900 mm	600 mm x 900 mm
Platform Height	160 mm	160 mm	190 mm	190 mm	240 mm
Overall Height	860 mm	860 mm	890 mm	890 mm	930 mm
Wheel Size	100 mm x 25 mm	100 mm x 25 mm	125 mm x 30 mm	125 mm x 30 mm	150 mm x 40 mm
Net Weight	14 kg / 16.5 kg	16 kg	16.5 kg / 19.4 kg	25 kg	35 kg / 32.5 kg

* All specifications are subject to change without prior notice.

LIFT TABLE

- Compact & Powerful
- Small Turning Radius
- Simple Design
- Easy to Operate
- Lightweight

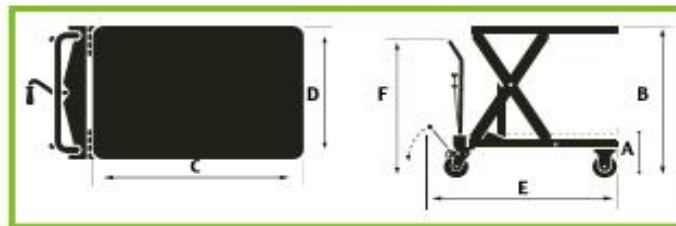

SPECIFICATIONS

	MODEL	LT-H250-8EC	LT-WH300-10EC	LT-H550-9EC	LT-TH600-20EC	LT-H1000-12EC
	Capacity	250 kg	300 kg	550 kg	600 kg	1,000 kg
A	Min. Height	240 mm	380 mm	325 mm	800 mm	400 mm
B	Max. Height	845 mm	1,000 mm	980 mm	2,000 mm	1,200 mm
D x C	Table Dimension	500 mm x 800 mm	500 mm x 650 mm	600 mm x 900 mm	600 mm x 1,000 mm	700 mm x 1,100 mm
D	Overall Width	500 mm	500 mm	600 mm	600 mm	700 mm
E	Overall Length	1,060 mm	900 mm	1,160 mm	1,260 mm	1,350 mm
F	Overall Height	840 mm	880 mm	910 mm	970 mm	965 mm
	Steering Wheel	100 mm x 40 mm	130 mm x 38 mm	150 mm x 40 mm	200 mm x 40 mm	200 mm x 40 mm
	Load Wheel	100 mm x 40 mm	130 mm x 38 mm	150 mm x 40 mm	200 mm x 40 mm	200 mm x 40 mm
	Pumping Times ()	25	60 (27)	60	144 (72)	131 (58)
	Net Weight	46 kg	88 kg	77 kg	230 kg	152 kg

Note: () Double Speed Lifting

*All specifications are subject to change without prior notice.

* Battery type and tailor made available upon request.

HYDRAULIC MANUAL STACKER



- Compact & Powerful
- Easy to Operate
- Simple Design
- Built-in with Safety Valve
- QLS Function



Safety Valve



Quick Lifting System (unloaded)

SPECIFICATIONS


MODEL	SH200-12	SH400-15	SH650-16	SH1000-16	SH1000-16L
Capacity	200 kg	400 kg	650 kg	1,000 kg	1,000 kg
Max. Height	1,200 mm	1,500 mm	1,600 mm	1,600 mm	1,600 mm
Min. Height	90 mm	90 mm	95 mm	95 mm	95 mm
Fork Length	500 mm	550 mm	650 mm	800 mm	1,100 mm
Fork Width	65 mm	75 mm	125 mm	125 mm	135 mm
Adjustable Fork Width	145 mm - 500 mm	165 mm - 520 mm	265 mm - 650 mm	265 mm - 600 mm	285 mm - 900 mm
Overall Height	1,530 mm	1,800 mm	1,950 mm	1,950 mm	1,950 mm
Overall Width	610 mm	620 mm	700 mm	650 mm	950 mm
Overall Length	950 mm	1,050 mm	1,300 mm	1,500 mm	1,800 mm
Net Weight	65 kg	105 kg	170 kg	230 kg	260 kg

* All specifications are subject to change without prior notice.

AERIAL WORK PLATFORM

SINGLE MAST AERIAL WORK PLATFORM

- Stable and Reliable

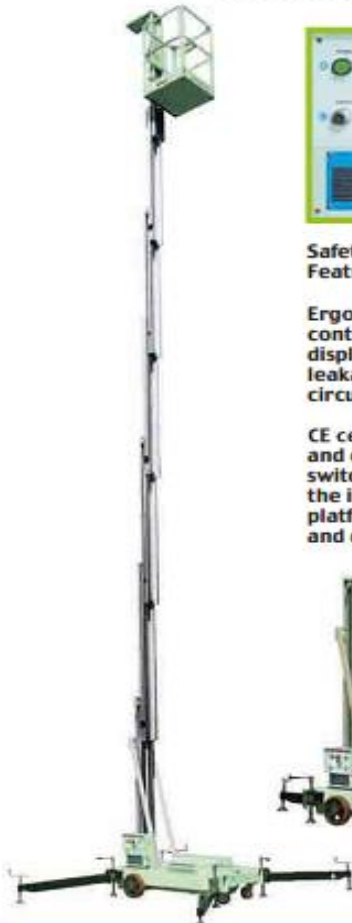

Safety Electrical Features

Ergonomic ground control panel, power display, electric leakage protection, circuit breaker etc.

CE certified stabilizers and electric safety switch elements from the inter-lock for platform ascending and descending



DOUBLE MAST AERIAL WORK PLATFORM

- Simple and Convenient



Double protection with supporting bolts and evolvable stabilizers to minimize the blind area of aerial work platform usage.



SPECIFICATIONS

MODEL	Max. Platform Height (m)	Max. Working Height (m)	Loading Capacity (kg)	Number Of Person Permitted On The Platform	Platform Size (mm)	Outrigger Footprint (mm)	Voltage (V/Hz)	Motor Rating Lifting (KW)	Stored Dimensions (mm) L x W x H	Machine Weight (kg)
GTWY6-1006	6	7.7	160	1	630 x 650	2,060 x 1,900	AC220/50	0.75	1,290 x 880 x 1,740	390
GTWY8-1008	8	9.7	136	1	630 x 650	2,300 x 2,180	AC220/50	0.75	1,290 x 880 x 2,080	420
GTWY10-1010	10	11.7	120	1	630 x 650	2,400 x 2,280	AC220/50	0.75	1,390 x 880 x 2,160	480
GTWY8-2008	8	9.7	300	2	1,200 x 600	2,020 x 2,000	AC220/50	0.75	1,390 x 880 x 1,860	610
GTWY10-2010	10	11.7	300	2	1,200 x 600	2,340 x 2,220	AC220/50	0.75	1,390 x 880 x 2,060	680
GTWY12-2012	12	13.7	250	2	1,330 x 600	2,560 x 2,460	AC220/50	1.5	1,590 x 1,020 x 2,440	810
GTWY14-4214	14	15.7	200	1	1,480 x 860	3,140 x 2,930	AC220/50	0.75 / 1.5	2,260 x 1,250 x 1,920	1,640
GTWY16-4216	16	17.7	136	1	700 x 700	4,170 x 3,070	AC220/50	0.75 / 1.5	3,120 x 1,250 x 2,190	1,690
GTWY18-4218	18	19.7	136	1	700 x 700	4,170 x 3,070	AC220/50	0.75 / 1.5	3,120 x 1,250 x 2,350	1,780

* The above models are available in either AC or DC type or dual operation.

* All specifications are subject to change without prior notice.

MOTOR BIKE LIFTER

- Compact
- Maintenance Free
- Safety Lightning Protection



SPECIFICATIONS

MODEL	MBL-30	MBL-50	MBL-2010 (Economy Type)
Capacity	300 kg	500 kg	300 kg
Min. Height	180 mm	180 mm	140 mm
Max. Height	700 mm	780 mm	700 mm
Table Size	1,550 mm (L) x 670 mm (W)	2,200 mm (L) x 800 mm (W)	1,400 mm (L) x 610 mm (W)
On Load	Lifting Time	About 10 seconds	About 10 seconds
	Lowering Time	Adjustable	Adjustable
Unload	Lifting Time	About 10 seconds	About 8 seconds
	Lowering Time	Adjustable	Adjustable
Power Source	240V	240V	240V
Control Switch	Push Button	Foot Switch	Push Button
Net Weight	178 kg	260 kg	125 kg
Suitable For	Motor shop	Service centre	Motor shop

* All specifications are subject to change without prior notice.

* MBL-2010 manual type available upon request.